




Der G Sub 1201 ist ein universeller 12" Hochleistungs-Subwoofer in besonders flacher Bauweise. Mit seiner vergrößerten Grundfläche können GL- und andere HiMid Systeme sehr standfest im Stangenbetrieb eingesetzt werden. Er überzeugt durch gutes Handling, exklusiv, modernes Design und tiefreichend sattes Bassfundament.

PRODUCT SPECIFICATIONS


Speaker Components	12" Nd (3" VC)
Description	Passive Bass Extension
Power AES / Peak	500 W / 1500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	99 dB / 131 dB
Usable Range	36 Hz - 250 Hz (- 6 dB)
Tuning Frequency excursion minimum	47 Hz
Connectors	2 x Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub 1 x Speakon NL4MP in/out Coding: 1+/- Sub, 2+/- loop thru
Handles	2 x
Rigging / Fittings	M20 on top
Weight	17,5 kg
Size height x width x depth	33,0 x 48,5 x 48,5 cm
Order No.	00610



Gummisicke für große Auslenkungen.



DIMENSIONS

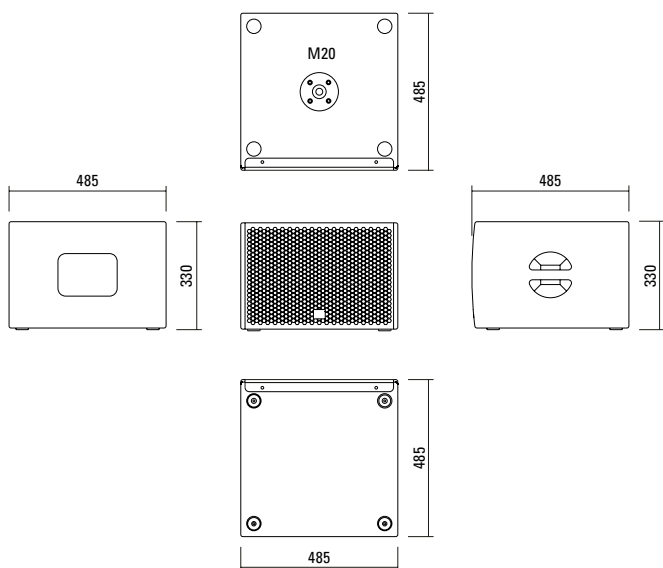


Controller Setups:


<https://www.seeburg.com/de/downloads>

MEASUREMENTS

Frequency Response with Presets

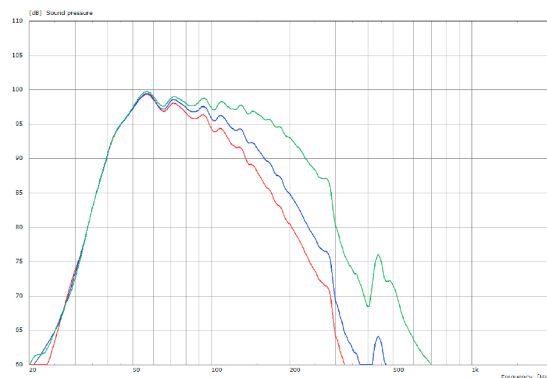

Sensitivity 1 W @ 1 m + Impedance

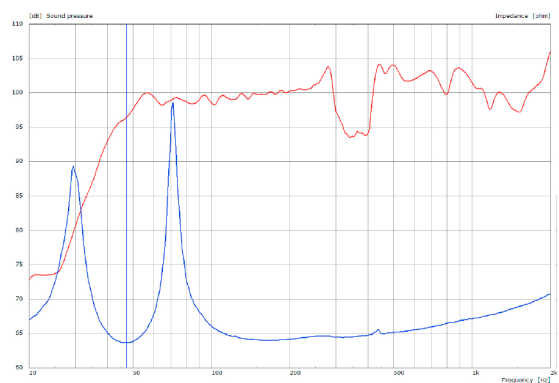

APPLICATIONS




G Sub 1201 / GL 16i



G Sub 1201 / L 16j



G Sub 1201 / X 2

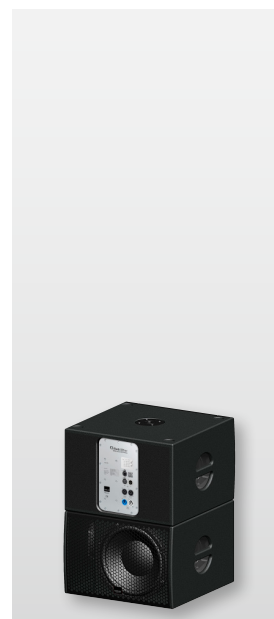

G Sub 1201 dp+ / G Sub 1201
Cardiod set-up

ACCESSORIES G Sub 1201

Wall Mount



bar: 269 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F/269/w** (RAL 9010)
Order No. **08130/F/269**

MultiRigg™ light



version for fixed installations,
for horizontal and vertical alignment,
incl. accessories (2 x M10 x 20 socket
head screws), max. load 50 kg

Order No. **01362**

Ceiling Mount



for Subwoofer, 2 parts,
incl. screws

Order No. **08129**
Order No. **08129/w** (RAL 9010)

Speaker Pole



M20, with wind up, K&M
Order No. **03023**



M20, adjustable, K&M
Order No. **03022**

Cover



for G Sub 1201, padded
Order No. **01237**

