




The G Sub 1201 is a particularly flat high-performance 12" subwoofer. With its large footprint it can accommodate GL- and other HiMid systems using speaker poles without toppling over. Easy handling, an exclusive and modern design and its deep bass reproduction make it a perfect choice for demanding applications.

PRODUCT SPECIFICATIONS


Speaker Components	12" Nd (3" VC)
Description	Passive Bass Extension
Power AES / Peak	500 W / 1500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	99 dB / 131 dB
Usable Range	36 Hz - 250 Hz (-6 dB)
Tuning Frequency excursion minimum	47 Hz
Connectors	2 x Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub 1 x Speakon NL4MP in/out Coding: 1+/- Sub, 2+/- loop thru
Handles	2 x
Rigging / Fittings	M20 on top
Weight	17,5 kg
Size height x width x depth	33,0 x 48,5 x 48,5 cm
Order No.	00610



Rubber Surround for large excursion.

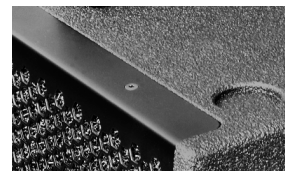

DIMENSIONS

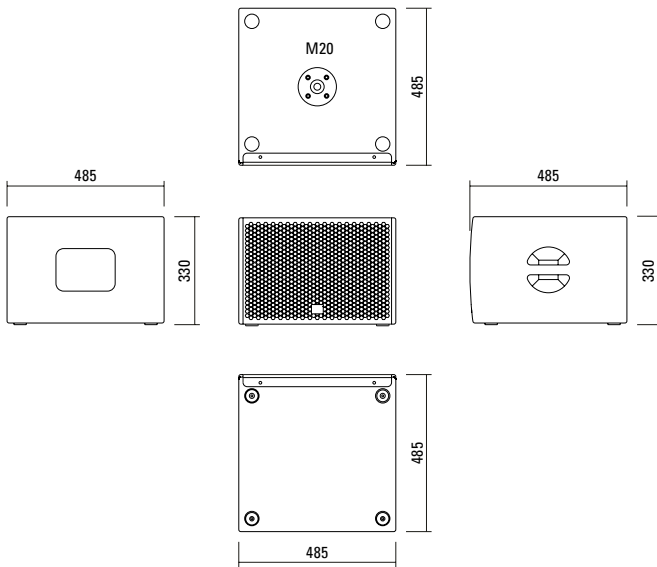


Controller Setups:


<https://www.seeburg.com/en/downloads>

MEASUREMENTS

Frequency Response with Presets

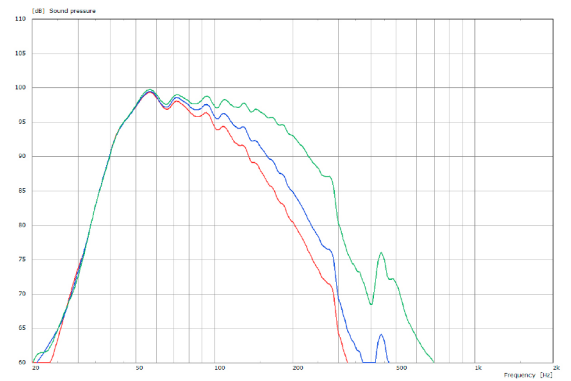

Sensitivity 1 W @ 1 m + Impedance

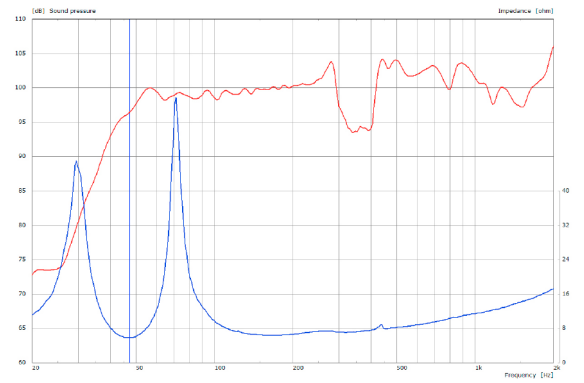

APPLICATIONS



G Sub 1201 / GL 16i



G Sub 1201 / L 16j



G Sub 1201 / X 2



G Sub 1201 dp+ / G Sub 1201
Cardiod set-up

ACCESSORIES G Sub 1201

Wall Mount



bar: 269 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F/269/w** (RAL 9010)
Order No. **08130/F/269**

MultiRigg™ light



version for fixed installations,
for horizontal and vertical alignment,
incl. accessories (2 x M10 x 20 socket
head screws), max. load 50 kg

Order No. **01362**

Ceiling Mount



for Subwoofer, 2 parts,
incl. screws

Order No. **08129**
Order No. **08129/w** (RAL 9010)

Speaker Pole



M20, with wind up, K&M
Order No. **03023**



M20, adjustable, K&M
Order No. **03022**

Cover



for G Sub 1201, padded
Order No. **01237**

