

# Bass Extension **G Sub 1501**



The G Sub 1501 is a particularly flat high-performance subwoofer. With a base measurement of 60 x 60 cm it can also accommodate larger HiMid systems using speaker poles without toppling over. Due to its height of only 40 cm, it can easily be integrated in existing stage constructions. Easy handling, an exclusive and modern design and its deep bass reproduction make it a perfect choice for demanding applications.

## PRODUCT SPECIFICATIONS


<b>Speaker Components</b>	15" Nd (4" VC)
<b>Description</b>	Passive Bass Extension
<b>Power</b> AES / Peak	1000 W / 3000 W
<b>Impedance</b> nominal	8 Ω
<b>SPL</b> 1 W / Peak @ 1 m	100 dB / 135 dB
<b>Usable Range</b>	35 Hz - 220 Hz (- 6 dB)
<b>Tuning Frequency</b> excursion minimum	42 Hz
<b>Connectors</b>	2 x Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub 1 x Speakon NL4MP in/out Coding: 1 +/- Sub, 2 +/- loop thru
<b>Handles</b>	2 x
<b>Rigging / Fittings</b>	M20 on top Wheelboard fittings
<b>Weight</b>	26,0 kg (+ 6,0 kg wheelboard)
<b>Size</b> height x width x depth	40,0 x 60,0 x 60,0 cm
<b>Order No.</b>	<b>00620</b>



Robust honeycomb type speaker grille. Wheel board fittings.



## DIMENSIONS

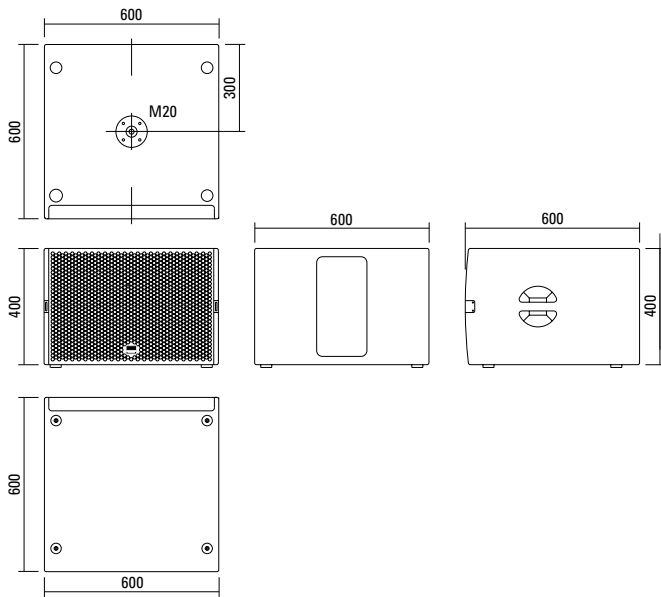


### Controller Setups:


<http://www.seeburg.net/en/downloads>

## MEASUREMENTS

### Frequency Response with Presets

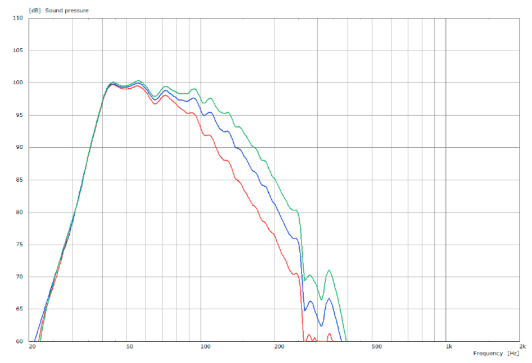

### Sensitivity 1 W @ 1 m + Impedance

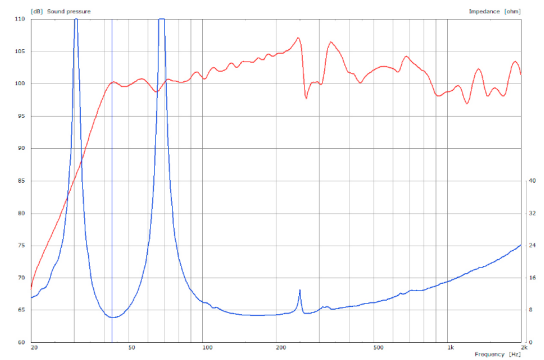

## APPLICATIONS




G Sub 1501 / GL 24



G Sub 1501 / X 4



G Sub 1501 / A 3

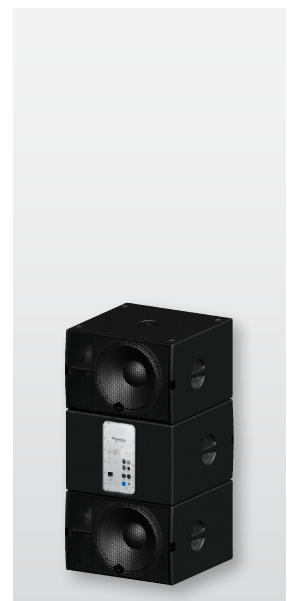

G Sub 1501 / G Sub 1501 dp+  
Cardiod-Anordnung

## ACCESSORIES G Sub 1501

### Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



### Wall Mount

bar: 400 mm, max. load 40 kg,  
incl. (M10 x 70 mm socket head screw,  
M10 hex lock nut and flat washer)

Order No. **08130/F400/w** (RAL 9010)

Order No. **08130/F400**



### Ceiling Mount

for Subwoofer,  
2 parts, incl. screws

Order No. **08129**

Order No. **08129/w** (RAL 9010)



### MultiRigg™ light

version for fixed installations,  
for horizontal and vertical alignment,  
incl. accessories (2 x M10 x 20 socket  
head screws), max. load 50 kg

Order No. **01362**



### Cover

for G Sub 1501,  
by using wheel board

Order No. **01239/WB**



### Cover

for G Sub 1501,  
without wheel board

Order No. **01239**



### Wheel Board

for G Sub 1501,  
stackable, 6 kg

Order No. **01267**

