




Passive expansion modules for extended throw or increased vertical coverage angle. With these modules, the GL 16 and GL 24 systems can be better tailored to specific applications and demanding acoustic environments. In standard form, the GL 8 modules are 2-way actively driven. A version with a passive crossover is also available.

## PRODUCT SPECIFICATIONS

	<b>GL 8 a</b>	<b>GL 8 xov</b>
<b>Speaker Components</b>	2 x 6,5" Nd / 8 x 1" Nd Tweeter	2 x 6,5" Nd / 8 x 1" Nd Tweeter
<b>Description</b>	Cylindric Wave Radiator	Cylindric Wave Radiator
<b>Power</b> <small>AES / Peak</small>	LF: 200 W / 600 W HF: 75 W / 225 W	200W / 600 W
<b>Impedance</b> <small>nominal</small>	LF: 16 Ω / HF: 16 Ω	16 Ω
<b>SPL</b> <small>1 W / Peak @ 1 m</small>	LF: > 93 dB / 121 dB HF: > 94 dB / 118 dB	> 121 dB
<b>Usable Range</b>	80 Hz - 20 kHz (-6 dB)	80 Hz - 20 kHz (-6 dB)
<b>Tuning Frequency</b> <small>excursion minimum</small>	90 Hz	90 Hz
<b>X - Overpoint</b> <small>acoustical</small>	Depends on preset	1,1 kHz
<b>Coverage</b> <small>horizontal / vertical</small>	100° x 7° (i-version) 100° x 31° (c-version)	100° x 7° (i-version) 100° x 31° (c-version)
<b>Mechanical Splay Angle</b>	0° (i-version) 24° (c-version)	0° (i-version) 24° (c-version)
<b>Connectors</b>	2 x Speakon NL4MP in/out Coding: 1 +/- HF, 2 +/- LF	2 x Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
<b>Handles</b>	1 x	1 x
<b>Rigging / Fittings</b>	8 x M10 (i-version) 6 x M10 (c-version)	8 x M10 (i-version) 6 x M10 (c-version)
<b>Weight</b>	8,5 kg	9,0 kg
<b>Size</b> <small>height x width x depth</small>	36,2 x 18,9 x 24,5 cm (i-v.) 38,0 x 18,9 x 25,8 (24,5) cm (c-v.)	36,2 x 18,9 x 24,5 cm (i-v.) 38,0 x 18,9 x 25,8 (24,5) cm (c-v.)
<b>Order No.</b>	<b>00490/i/a</b> (i-version) <b>00490/c/a</b> (c-version)	<b>00490/i/xov</b> (i-version) <b>00490/c/xov</b> (c-version)




Simple installation of the expansion module.




## DIMENSIONS

### GL 8i

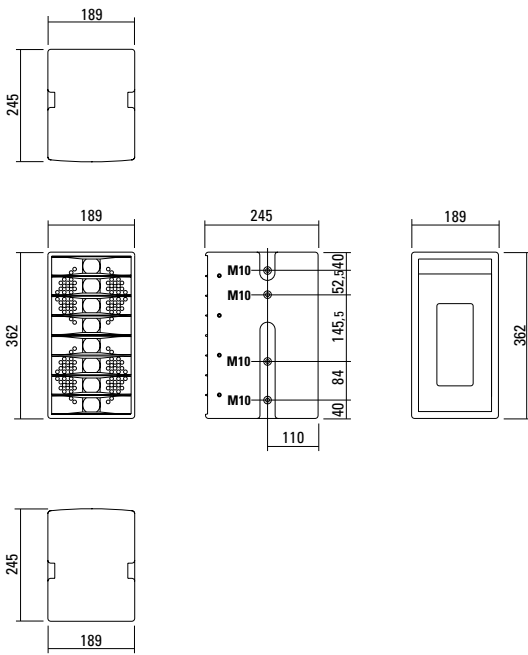

### GL 8c

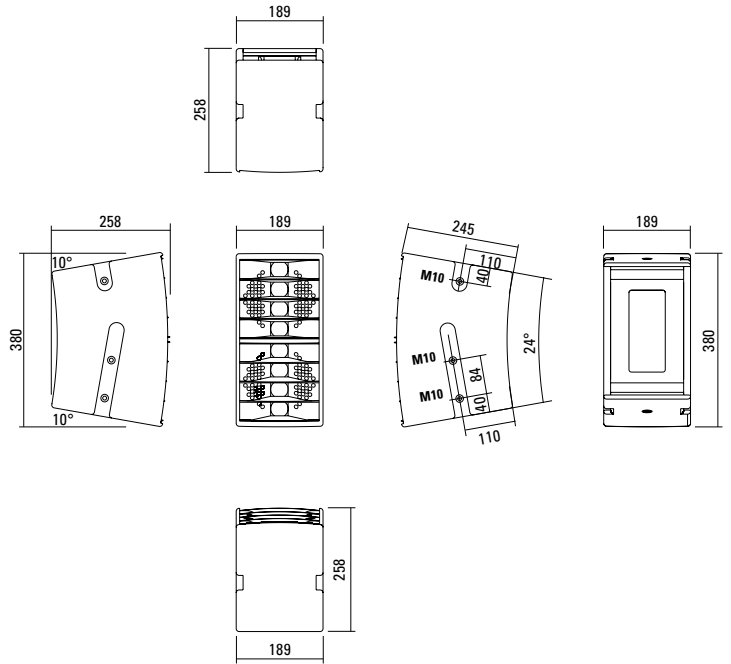

## APPLICATIONS



GL 8 i / GL 24



GL 16 c / GL 8 c



GL 8 i / GL 24 j



Simple installation of the expansion module.



**Flying Cradle**

for GL System,  
max. load 120 kg,  
incl. shackle (01372/GL)  
Order No. **01354**



**Cradle**

short, for GL System,  
fixing points for MultiRigg™  
Order No. **01351**



**Flying J-Bracket**

for A 1 / GL 8 / X 1 / X 2 / TS Nano,  
horizontal and vertical alignment,  
incl. (white version: 1 x M10 x 20  
socket head screws, black version:  
1 x M10 x 20 adjustable handle screw)  
Order No. **01200/set/w** (RAL 9010)  
Order No. **01200/set**



**MultiRigg™**

swiveling fastening solution  
for horizontal and vertical alignment,  
for flown / ground stacked / mounted  
applications, incl. accessories  
(2 x knurled screws M10 x 20 mm,  
1 x handle screw M8 x 55 mm),  
max. load 50 kg  
Order No. **01360**



**MultiRigg™ light**

version for fixed installations,  
for horizontal and vertical alignment,  
tiltable vertical angle,  
incl. accessories (2 x M10 x 20 socket  
head screws), max. load 50 kg  
Order No. **01362**



**Knurled Head Nut**

reduction screw for fastening  
M10 Pole Mount Adapter (08126)  
Order No. **73755**



**Flange**

with ball and socket joint,  
with additional locking screw,  
M10 x 15, max. load 15 kg  
Order No. **08125**



**Pole Mount**

35 mm  $\varnothing$   $\rightarrow$  M10,  
adjustable  
Order No. **08126/adj**



**Pole Mount Adapter**

35 mm  $\varnothing$   $\rightarrow$  M10 x 16 mm,  
M8 x 20 star knob screw  
Order No. **08126**  
Order No. **08126/w** (RAL 9010)



**Pole Mount Adapter**

35 mm  $\varnothing$   $\rightarrow$  M10 x 16 mm  
Order No. **08126/II**  
Order No. **08126/II/w** (RAL 9010)



## ACCESSORIES GL 8

### Connection Bar



GL 24 standard version → GL 8c  
for Downfill, a pair, incl. screws  
Order No. **08159**

### Knurled Screw



M10 x 20 mm  
Order No. **73750/w** (RAL 9010)  
Order No. **73750**

### Steel Safety



6 mm x 600 mm, black,  
max. load 22 kg (BGI 810-3),  
quick connector undetachably  
Order No. **01376/6**

### Shackle



for GL-flying cradle,  
WLL 1000 kg  
Order No. **01372/GL**

### TV Spigot



10 mm internal thread,  
28 mm Ø  
Order No. **08128**

### Ring Screw



M10– DIN 580  
Order No. **73700** (zincd)  
Order No. **73700/sw** (black zincd)

### Bag



for 2 x GL 8 / for 2 x X 2 / 2 x TSM 8,  
padded with pocket for accessories,  
padded with pocket for accessories  
Order No. **01245**

### Height Extender



for stacking  
GL 8 i, GL 16 i, GL 16 Sub,  
height 35,4 cm  
Order No. **01277/35**

### Bag



for 2 x GL 8 / for 2 x X 2 / 2 x TSM 8,  
padded with pocket for accessories,  
padded with pocket for accessories  
Order No. **01245**