

High Performance Subwoofer **A 8 Sub**



15" Subwoofereerweiterung für die A 8. Zuschaltbare Weiche für den Passivbetrieb. Große, verlustarme Bassreflexöffnungen und das Neodymchassis mit einer 100 mm Schwingspule sorgen für eine besonders trockene und kräftige Basswiedergabe bis zur unteren Grenzfrequenz von 40 Hz.

PRODUCT SPECIFICATIONS


Speaker Components	15" Nd
Description	Passive Bass Extension
Power AES / Peak	600 W / 1800 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	97 dB / 128 dB
Usable Range - 6 dB	40 Hz - 220 Hz
Tuning Frequency excursion minimum	48 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub
Handles	2 x
Rigging / Fittings	3 x M10 (optional) M20 on top
Weight	24,0 kg
Size height x width x depth	69,8 x 45,0 x 42,5 cm
Order No.	00280



Wasserabweisende Membranbeschichtung des 15" Neodym Chassis.




Die M20 Flanschplatte dient zur Aufnahme einer Distanzstange für das Topteil.



Die 100 mm Schwingspule sorgt für eine kräftige Basswiedergabe.

DIMENSIONS

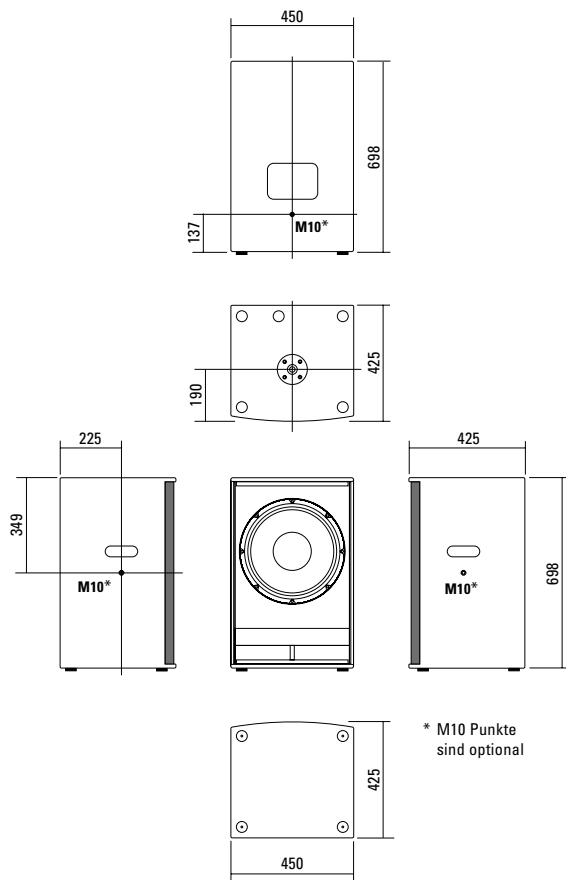


Controller Setups finden Sie unter:

<http://www.seeburg.net/downloads.php>

MEASUREMENTS

Impedance (passive)

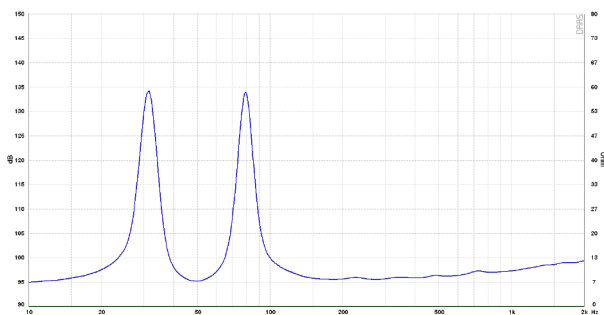

ACCESSORIES A 8 Sub

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Cover

for A 8 Sub,
padded

Order No. **01241**



Flightcase

for 2 pcs. A 8 Sub / A 8 / TSM 15,
heavy duty, 9,0 mm birch multiplex,
PVC coated, ball corners, 6 pcs re-
cessed sprung handles, 4 pcs. butterfly
catches, 100 mm blue wheels, 2 pcs.
with brake, interior lined with felt.

Order No. **16012/pro**

