




Der G Sub 1201 ist ein universeller 12" Hochleistungs-Subwoofer in besonders flacher Bauweise. Mit seiner vergrößerten Grundfläche können GL- und andere HiMid Systeme sehr standfest im Stangenbetrieb eingesetzt werden. Er überzeugt durch gutes Handling, exklusiv, modernes Design und tiefreichend sattes Bassfundament.

PRODUCT SPECIFICATIONS

Speaker Components	12" Nd
Description	Passive Bass Extension
Power AES / Peak	500 W / 1500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	99 dB / 131 dB
Usable Range	36 Hz - 250 Hz (- 6 dB)
Tuning Frequency excursion minimum	47 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub Incl. Switcher for active / passive operation
Handles	2 x
Rigging / Fittings	M20 on top
Weight	17,5 kg
Size height x width x depth	33,0 x 48,5 x 48,5 cm
Order No.	00610




Gummissie für große Auslenkungen.




Komfortable Schalenriffe für den einfachen Transport.

DIMENSIONS

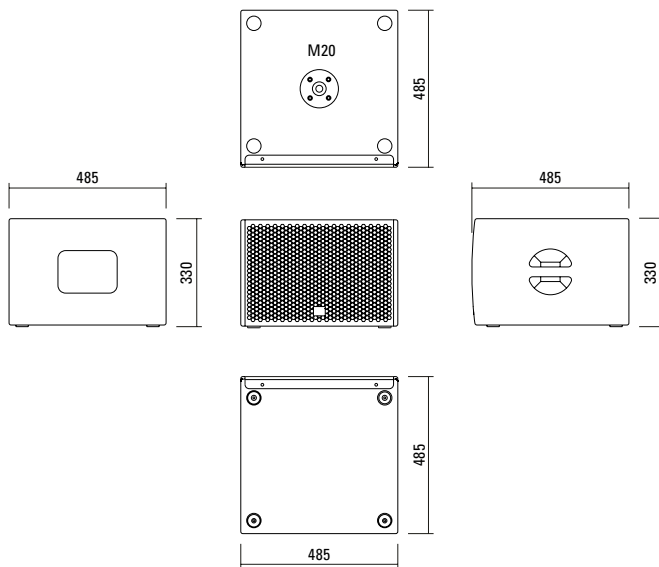


MEASUREMENTS

Frequency Response with Presets

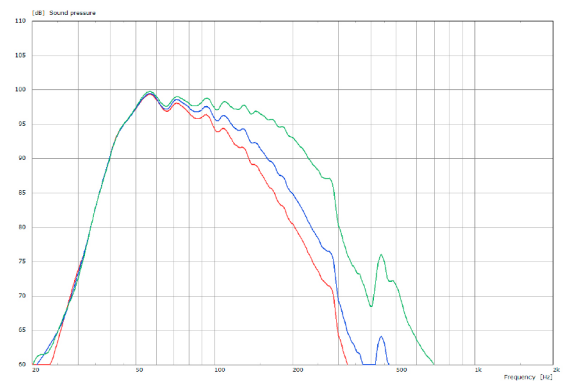

Sensitivity 1 W @ 1 m + Impedance

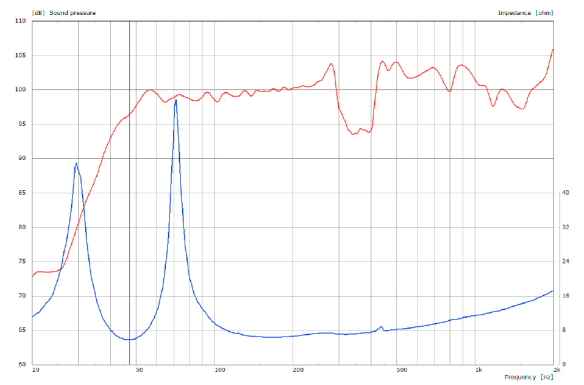

APPLICATIONS



G Sub 1201 / GL 16i



G Sub 1201 / L 16j



G Sub 1201 / TSM 8



G Sub 1201 dp+ / G Sub 1201 (n.h.)
Cardioid-Anordnung

ACCESSORIES G Sub 1201

Wall Mount



max. load 40 kg, bar: 269 mm,
incl. (M10 x 70 mm socket head
screw, M10 hex lock nut and flat
washer)

Order No. **08130/F269**
Order No. **08130/F269/w** (RAL 9010)

Ceiling Mount



for Subwoofer,
2 parts, incl. screws

Order No. **08129**
Order No. **08129/w** (RAL 9010)

MultiRigg™ light



version for fixed installations,
for horizontal and vertical alignment,
incl. accessories (2 x M10 x 20 socket
head screws), max. load 50 kg

Order No. **01362**

Speaker Pole



M20, with wind up, K&M
Order No. **03023**



M20, adjustable, K&M
Order No. **03022**

Cover



for G Sub 1201, padded
Order No. **01237**

