D Sub 15



The D Sub 15 is a cardioid-radiating subwoofer with outstanding broad-band directivity. The high-performance 15" driver installed on the front operates in a bass reflex enclosure with optimized flow profiles, while the 12" chassis on the rear is responsible for directivity. The D Sub 15 is driven actively in a 2-way configuration via the system amplifier. The desired dispersion characteristics are set using the corresponding presets.

PRODUCT SPECIFICATIONS

Speaker Components	Front: 15" Nd (4" VC) Rear: 12" Nd (3" VC)
Description	Directional Subwoofer
Power AES / Peak	Front: 1000 W / 3000 W Rear: 500 W / 1500 W
Impedance nominal	Front: 8 Ω / Rear: 8 Ω
SPL 1 W / Peak @ 1 m	100 dB / 137 dB
Usable Range	40 Hz - 200 Hz (-6 dB)
Tuning Frequency excursion minimum	45 Hz
Connectors	2 x Speakon NL4MP in/out Coding (normal): 1+/- Rear, 2+/- Front Coding (switched): 1+/- loop thru, 2+/- Sub
Handles	6 x
Rigging / Fittings	2 x M20 for speaker poles
Weight	46 kg
Size height x width x depth	49.0 x 58.0 x 78.0 cm
Order No.	**00650**








Copyright 10-2026


SEEBURG
acoustic line

DIMENSIONS

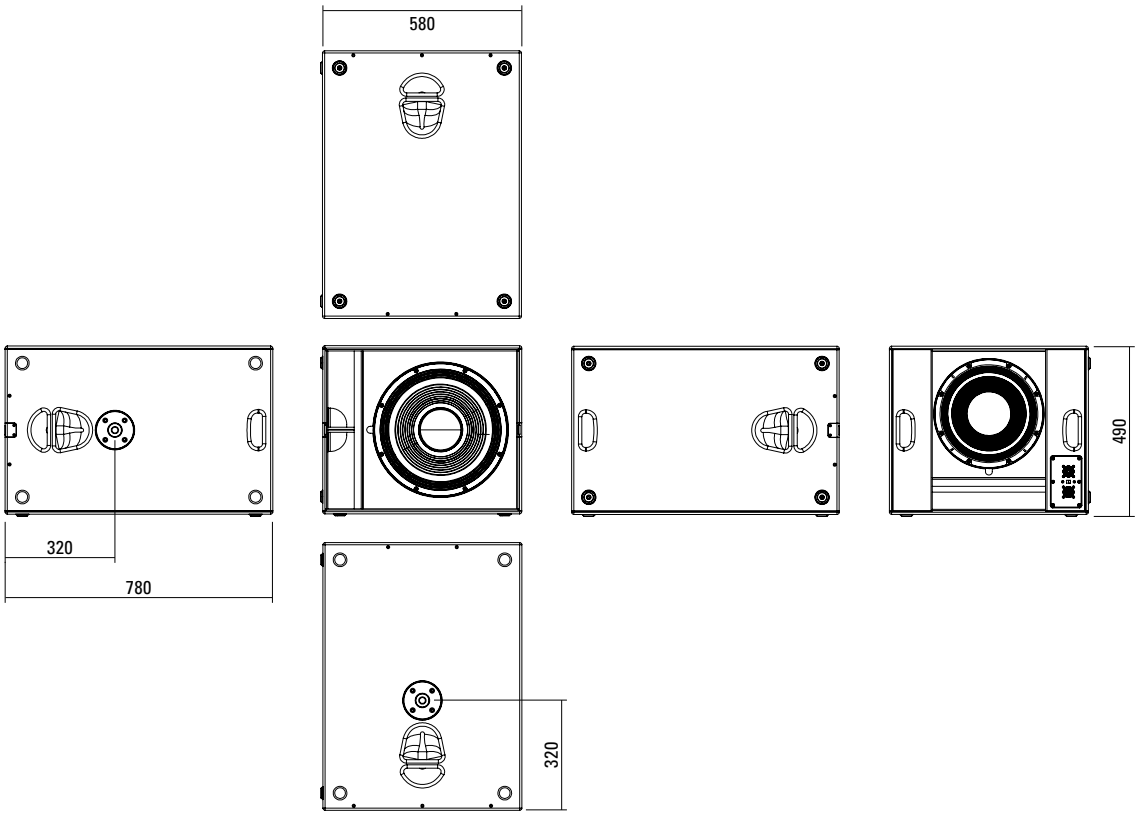


MEASUREMENTS


Cardioid Mode

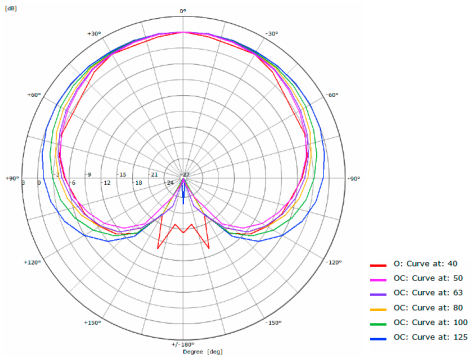


Hypercardioid Mode

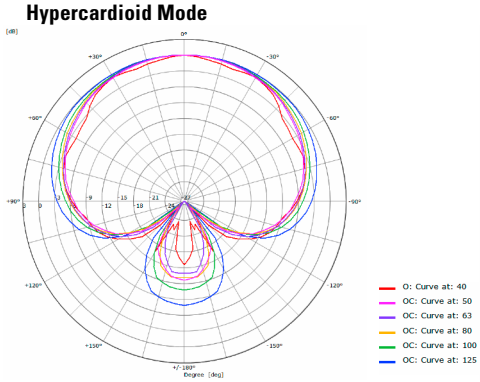

Endfired Mode

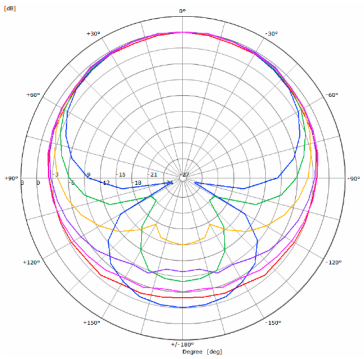

Frequency Response with Presets

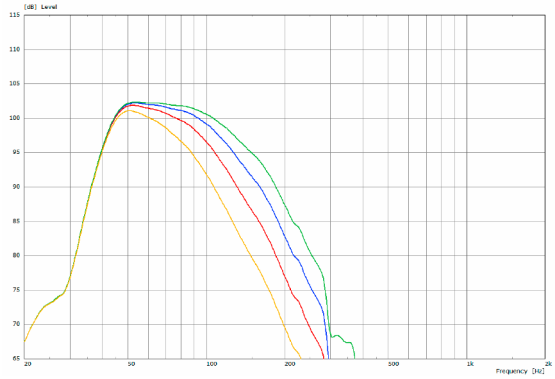

SEEBURG acoustic line
Produktions- und Vertriebs GmbH
Fon: +49 (0)7307 97 00-0
Fax: +49 (0)7307 97 00-29
Auweg 32
D-89250 Senden-Freudenegg
info@seeburg.net
www.seeburg.com

SEEBURG acoustic line