



An unobtrusive and elegant HiMid system for permanent installations and coporate applications. The classic 2 x 6.5"/1" combination provides for clear and transparent speech reproduction and a good throw. Four M10 mounting points (and a fifth as an

optional alternative to the speaker stand socket) in combination with the comprehensive accessory range allow simple vertical or horizontal mounting. The A 2 is also available in the TR-version with 100 V transformer.

PRODUCT SPECIFICATIONS

| Speaker Components | 2 x 6,5" Nd / 1" |
|------------------------------------|--|
| Description | HiMid Sound System |
| Power AES / Peak | 400 W / 1200 W |
| Impedance nominal | 16 Ω (4 Ω optional) |
| SPL 1 W / Peak @ 1 m | 95 dB / 126 dB |
| Usable Range | 75 Hz - 19 kHz (-10 dB) |
| Tuning Frequency excursion minimum | 91 Hz |
| X - Overpoint acoustical | 2,5 kHz |
| Coverage horizontal / vertical | 90° x 60° - rotatable |
| Max. Splay Angle | |
| Connectors | 2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru |
| Handles | 1 x |
| Rigging / Fittings | 4 x M10 35 mm pole mount |
| Weight | 9,5 kg |
| Size height x width x depth | 51,0 x 21,0 x 21,0 cm |
| Order No. | 00230/16/II 00230/16/TR/II (with 100 V transformer) |




Ergonomically formed handle slot on the rear side for comfortable transport.



Connection Panel.






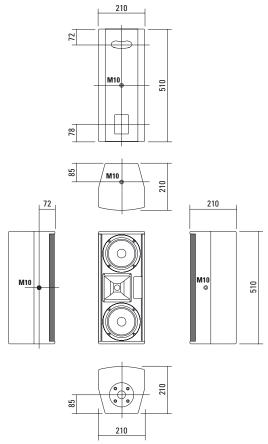


Controller Setups:


https://www.seeburg.com/en/downloads




Sensitivity 1 W @ 1 m + Impedance



COVERAGE PATTERNS



2D Directivity Plot - vertical





Flying Bracket

for A 2, horizontal alignment, incl. screws (per unit: 2 pcs. M10 x 20 socket head screws, spring- and rubber washers)

Order No. 01214/H/set



Flying Bracket

for A 2, incl. screws (per unit: 2 pcs. M10 x 20 ergostyle lobe knob and rubber washers)

Order No. 01214/set





for flying brackets, M10 x20, with grip, adjustable

Order No. **08171**

Plate



for A 2 / A 3 flying brackets, horizontal alignment, replacement for pole mount flange, 110 mm Ø flange with M10 nut

Order No. 08119/M10

Flange



for flying brackets, 35 mm Ø -> M10,

Order No. 08126

Flange



with ball and socket joint, with additional locking screw, M10 x 15, max. load 15 kg

Order No. 08125

Truss Clamp



incl. M10 Adapter, max. load 15 kg Order No. **01221**

Doughty Quick Trigger Clamp

max. load 250 kg Order No. 01223



Steel Safety



4 mm x 600 mm, black, max. load 10 kg (BGI 810-3), quick connector undetachably

Order No. 01376/4

Rubber Washer



for flying brackets, 40 mm

Order No. **01205**

Chain Fastener



VBS 7 mm Order No. 01378

Ring Screw



M10-DIN 580

Order No. **73700**

TV Spigot



10 mm internal thread, 28 mm Ø

Order No. 08128



Flying Bracket



ACCESSORIES A 2

Wall Mount



with ball joint flange (08125) Order No. 08125/plate

Wall Mount



for U-brackets, max. load 40 kg, (M10 x 70 mm socket head screw, M10 hex lock nut and flat washer)

for 8"-12" speakers Order No. 08130/F/269

Wall Mount



with tilt unit, max. load 40 kg Order No. 08130

Wall Mount



M10, max. load 15 kg, with stargrip



Order No. **08131/W** (white)



For permanent installation, incl. tilt angle stop

Order No. 08131/F

Order No. **08131/F/W** (white)

Wall Mount



2 x M6 fixing holes (d=73 mm), 1 x M10 fixing hole (center), max. load 25 kg

Order No. **03034**

Spacer



for Wall Mount (03034) polyurea coated Order No. 03034/spc

Speaker Stand



K&M, incl. wind up, height 138,5 to 218 cm, max. load 50 kg,

Order No. 03011

K&M, height 137,5 to 218,5 cm, max. load 50 kg,


Order No. **03010**

Bag



for A 2, padded Order No. 01243

Honeycomb Grilles



for A2 front replacement.

Foam behind grille

Order No. 97004/hex/compl

Order No. 97004/hex/compl/w (white)



Foam in front of grille

Order No. 97004/compl.

Order No. 97004/compl/w (white)



Spacer -> Wall Mount