





Ultra compact loudspeaker system for applications requiring good acoustic and power handling characteristics in a particularly unobtrusive package. The powerful 5" Neodymium coaxial driver provides very wide but precise coverage, distortion free up to levels of over 115 dB. Multiple flying points and connection possibilities make the i5 system a universal sound reinforcement tool suitable for a wide range of near field applications.

PRODUCT SPECIFICATIONS

Speaker Components	5" Nd (1,5" VC) / 0,75" coaxial
Description	Multi Media Sound System
Power AES / Peak	120 W / 360 W
Impedance nominal	16 Ω
SPL 1 W / Peak @ 1 m	93 dB / 115 dB
Usable Range	110 Hz - 19 kHz (-6 dB)
Tuning Frequency excursion minimum	120 Hz
X-Overpoint acoustical	3,0 kHz
Coverage horizontal / vertical	100° - conical
Connectors	2 x Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru 1 x Phoenix 4-pol
Rigging / Fittings	3 x M10
Weight	2,5 kg
Size height x width x depth	15,0 x 15,0 x 17,6 cm
Order No.	00160/black 00160/white (RAL 9010)



DIMENSIONS

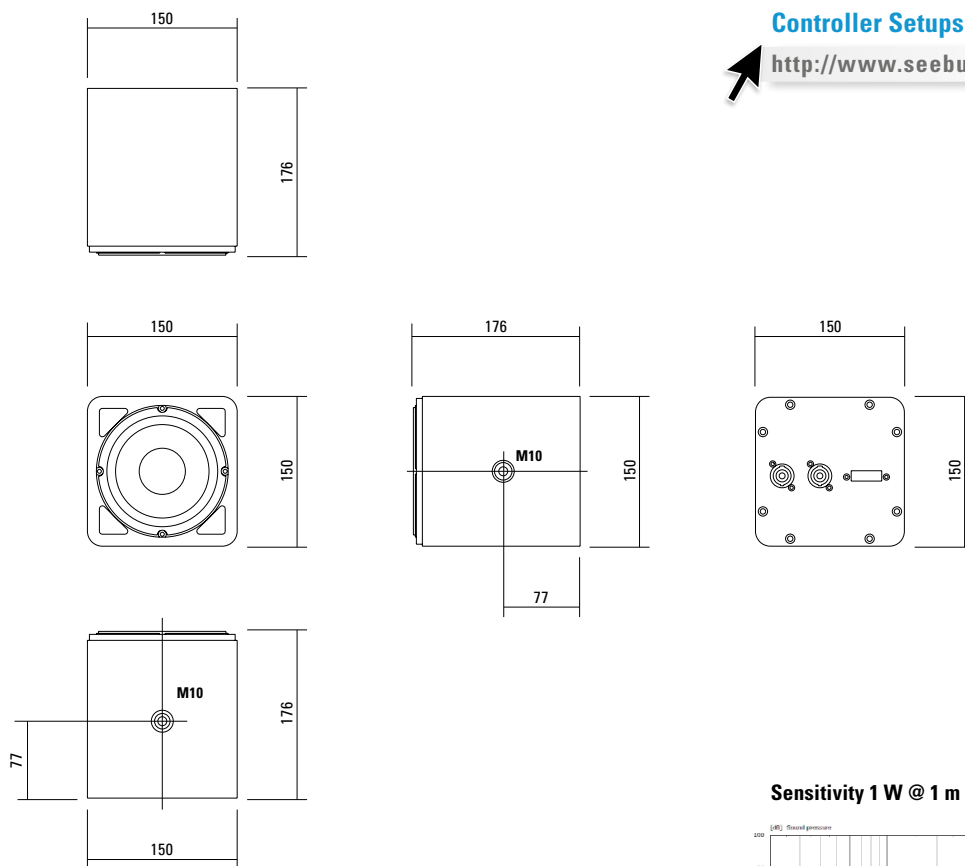


Controller Setups:


<http://www.seeburg.net/en/downloads>

MEASUREMENTS


Frequency Response with Presets

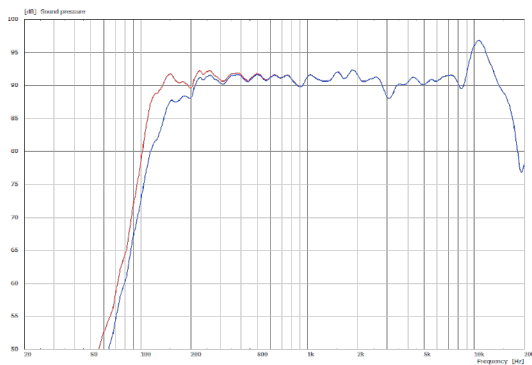

Sensitivity 1 W @ 1 m + Impedance

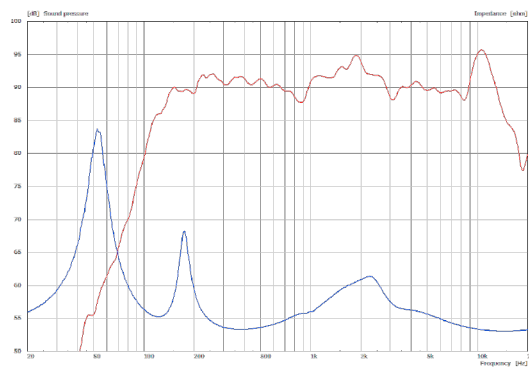

2D Directivity Plot - radial

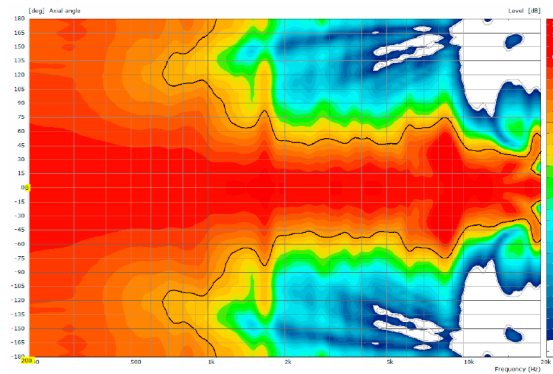

ACCESSORIES i5

Flying Bracket



for i 5,
incl. socket screws,
2 x M10 x 20 mm
Order No. **01204**
Order No. **01204/w** (RAL 9010)

Knurled Screw



M10 x 20 mm
Order No. **73750**
Order No. **73750/w** (RAL 9010)

Phoenix Connector



2 pol Order No. **08257**
4 pol Order No. **08256**

Doughty Twenty Clamp



M10, max. load 20 kg
Order No. **01223/20 kg**

Truss Clamp



incl. M10 Adapter,
max. load 15 kg
Order No. **01221**

Flange



with ball and socket joint,
with additional locking screw,
M10 x 15, max. load 15 kg
Order No. **08125**

Steel Safety



4 mm x 600 mm, black,
max. load 10 kg (BGI 810-3),
quick connector undetachably
Order No. **01376/4**

Base Plate, Round



M20, K&M,
ø 450 mm, height: 21 mm
black zinc die-cast, felt strips on
the bottom, weight: 6,7 kg
Order No. **01278/round**

Speaker Pole, Light

adjustable, K&M,
incl. M20 Adapter
Order No. **03004/set**



Flight Case



for 4 pcs. i 5, with mounted flying
brackets 01204, standard, 7,0 mm
birch multiplex, PVC coated, partition
walls, hinged lid, 2 x recessed sprung
handles, 1 x butterfly catch, rubber
feet, interior lined with felt.
Size (H x W x D): 24,0 x 42,0 x 36,0 cm
Order No. **16454**

Flight Case



for 2 pcs. i 5, with mounted flying
brackets 01204, standard, 7,0 mm
birch multiplex, PVC coated, partition
walls, hinged lid, 1 x recessed sprung
handle, 1 x butterfly catch, rubber feet,
interior lined with felt.
Size (H x W x D): 24,0 x 42,0 x 19,0 cm
Order No. **16453**

