

The K Sub 1801 is a compact highpower subwoofer for universal use in the frequency range of 33 Hz to 180 Hz. The classic bass reflex design with streamlined ports leads to a exceptional precise and deep bass response with medium throw. Two ergonimical handles ensure perfect handling. For transportation, a wheelboard can be mounted to the front side.

PRODUCT SPECIFICATIONS

Speaker Components	18" (4" VC)
Description	Passive Bass Extension
Power AES / Peak	1500 W / 4500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	101 dB / 137 dB
Usable Range - 6 dB	33 Hz - 180 Hz
Tuning Frequency excursion minimum	38 Hz
Connectors	2 x Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub
Handles	4 x
Rigging / Fittings	M20 on top and side Wheel board fittings
Weight	42,5 kg (+7,0 kg wheel board)
Size height x width x depth	69,8 x 51,2 x 56,0 cm
Order No.	01060



Two ergonimical handles ensure perfect handling.




Robust front grille.




Four convenient bar handles at the corner.



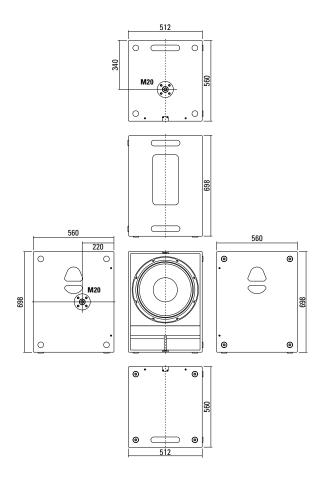


MEASUREMENT

Frequency Response with Presets



Sensitivity 1 W @ 1 m + Impedance



Controller Setups:

https://www.seeburg.com/en/downloads

APPLICATIONS



2 x K Sub 1801 / K 24



K Sub 1801 / GL 24



3 x K Sub 1801 d Cardioid set-up



www.seeburg.com

ACCESSORIES K Sub 1801



Speaker Pole

250 mm, ø 35 mm, M20, with ring lock Order No. **03020**



Speaker Pole M20, with wind up

Order No. 03023

M20, adjustable Order No. **03022**

Ground Stacking Board



for K Sub 1801 / G Sub with extendable legs Order No. **01394**

Wheel Board

for G Sub / K Sub 1801, stackable, 7 kg

Order No. **01260**



D

Cover

for K Sub 1801 with wheel board Order No. **01257**





3 | K Sub 1801

0 Auweg 32 29 D-89250 Senden-Freudenegg

info@seeburg.net www.seeburg.com

