


MultiRigg™


Tilting bracket for horizontal and vertical mounting of loudspeakers in flown systems, ground stacks and permanent installations.

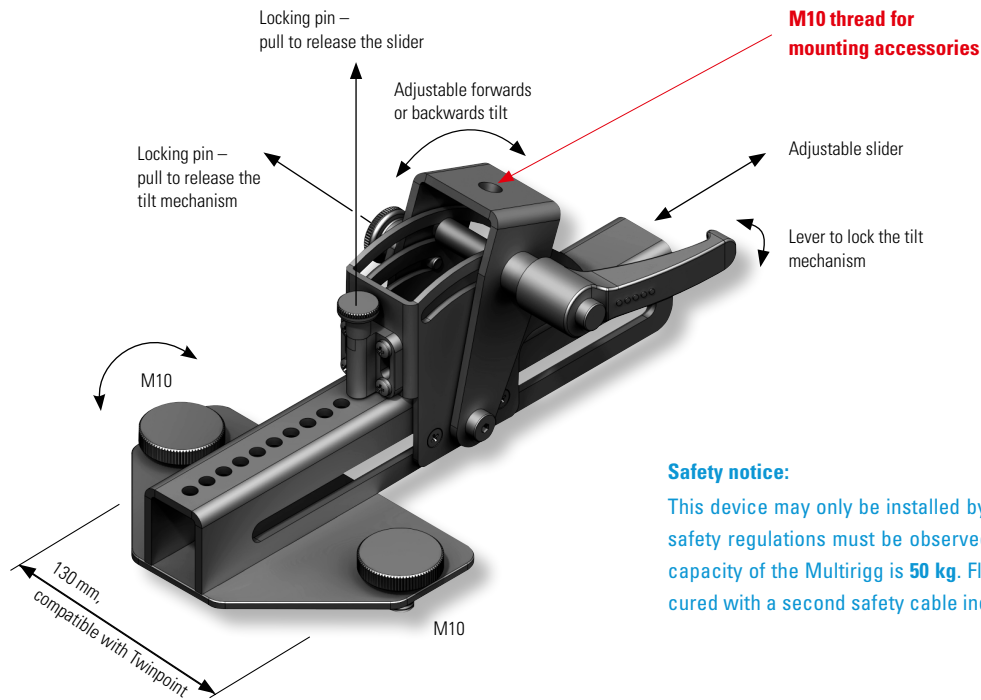

Safety notice:

This device may only be installed by qualified personnel. All relevant safety regulations must be observed at all times. The maximum load capacity of the MultiRigg is **50 kg**. Flown systems must always be secured with a second safety cable independent of the MultiRigg.


ACCESSORIES

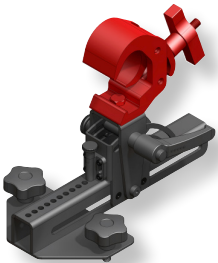

MultiRigg with Clamp
Order No. **01223/100kg**
oder
Order No. **01223/250kg**
for flown systems



MultiRigg with TV Spigot
28 mm ø, M10
Order No. **08128**
for flown systems or
mounting on a stand

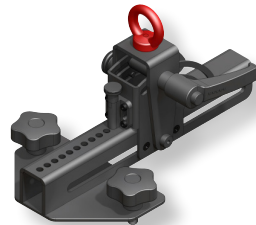

MultiRigg with M10 Ring Screw
Order No. **73700/M10**
for flown systems



MultiRigg with 35 mm Flange
Order No. **08126**
for mounting on a stand

APPLICATIONS

