

High Performance Subwoofer **A 8 Sub**



15" Sub-extension for the A 8.
Switch activated crossover for passive operation. Large, low-loss bass reflex chambers and the Neodym chassis with a 100 mm voice coil ensure exceptionally punchy and powerful bass response down to 40 Hz.

PRODUCT SPECIFICATIONS


Speaker Components	15" Nd
Description	Passive Bass Extension
Power AES / Peak	600 W / 1800 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	97 dB / 128 dB
Usable Range - 6 dB	40 Hz - 220 Hz
Tuning Frequency excursion minimum	48 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1+/- loop thru, 2+/- Sub
Handles	2 x
Rigging / Fittings	3 x M10 (optional) M20 on top
Weight	24,0 kg
Size height x width x depth	69,8 x 45,0 x 42,5 cm
Order No.	00280



The 15" Neodym driver has a water resistant coating.




An M20 threaded flange provides the mounting point for a speaker pole.



The 100mm voice coil ensures solid bass reproduction.

DIMENSIONS

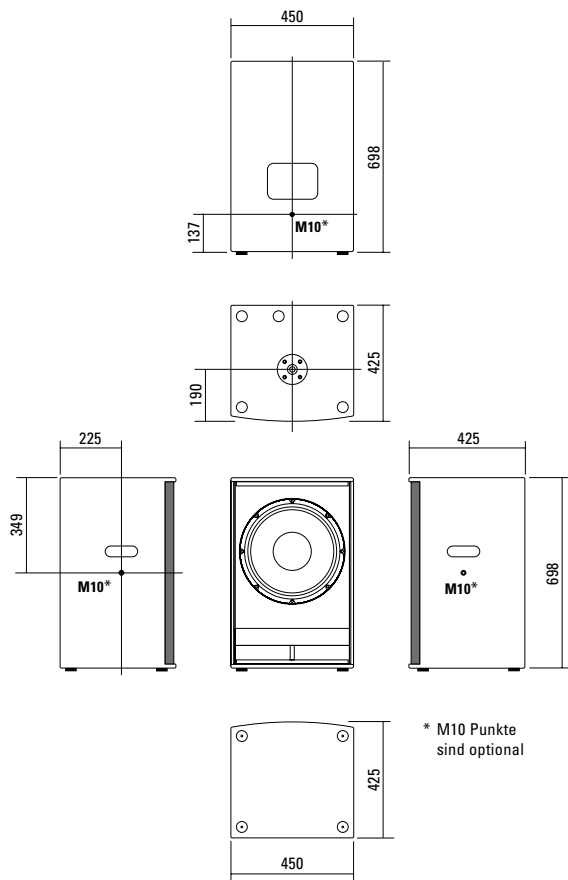


Controller Setups are available on our website:

<http://www.seeburg.net/downloads.php>

MEASUREMENTS

Impedance (passive)

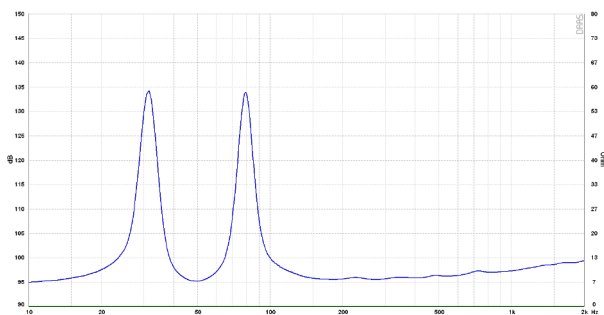

ACCESSORIES A 8 Sub

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Cover

for A 8 Sub,
padded

Order No. **01241**



Flightcase

for 2 pcs. A 8 Sub / A 8 / TSM 15,
heavy duty, 9,0 mm birch multiplex,
PVC coated, ball corners, 6 pcs re-
cessed sprung handles, 4 pcs. butterfly
catches, 100 mm blue wheels, 2 pcs.
with brake, interior lined with felt.

Order No. **16012/pro**

