TSD 15 / Downfill for TSE System

Downfill for TSE system.
15“ / 2” Coaxial speaker system.
MAN CF4 flying points and flying tracks.

PRODUCT SPECIFICATIONS

Speaker Components	15“ / 2” Coaxial
Description	Downfill for TSE System
Powerhandling - AES / Peak	500 Watt / 1500 Watt
Impedance - nominal	8 Ohm
SPL 1m - 1Watt / Peak	99dB / 129dB
Usable Range	50Hz - 18kHz
Tuning Frequency - Excursion min.	55Hz
X - Overpoint - acoustical	1,0kHz
Coverage - horizontal / vertical	80° conical
Handles	2x 4D handle
Rigging - flying points	2x MAN CF4 / 2x M10
	2x Riggingbar
	2x 225mm Flying Tracks
Fittings	35mm pole mount
Weight	30,0kg
Size - height x width x depth	51,2 x 51,2 x 47,0 cm
Art. Nr.	0955

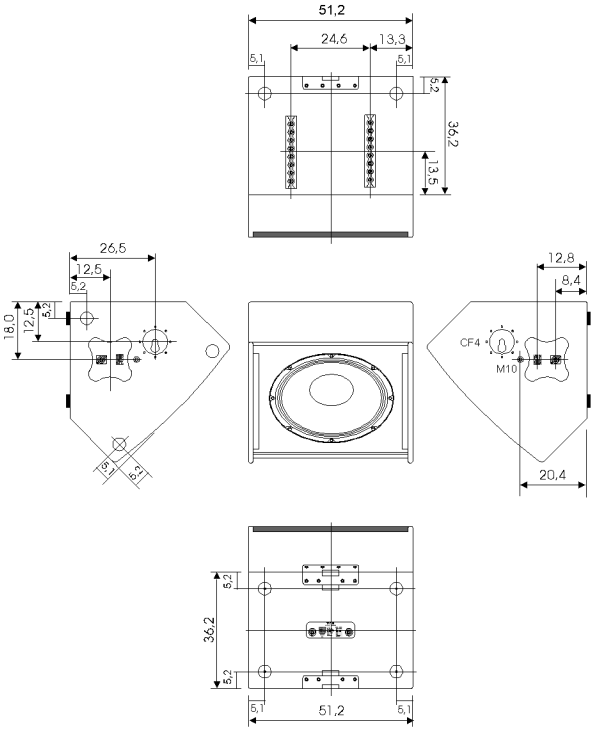

acoustic line SEEBURG Professional PA Systems

Copyright SEEBURG acoustic line GmbH . D-89250 Senden/Freudenegg . Phone +49.7307.9700-0 . Fax -29
www.seeburg.net - E-mail: info@seeburg.net