

Bass Extension - double coil **TSMini Sub dc**

Very compact subwoofer providing high SPL and solid deep bass response. The power handling capacity and precision of this system are due to the special long excursion, high power 12" Neodym woofer and the extremely efficient tunnel geometry. Features 2 x 4 Ω drive coils and a passive crossover.



PRODUCT SPECIFICATIONS


Speaker Components	12" Nd
Description	Passive Bass Extension
Power AES / Peak	2 x 500 W / 2 x 1500 W
Impedance nominal	2 x 4 Ω
SPL 1 W/ Peak @ 1 m	93 dB / 127 dB
Usable Range - 6 dB	40 Hz - 220 Hz
Tuning Frequency excursion minimum	48 Hz
Connectors	2 x Neutrik Speakon NL4MP in 2 x Neutrik Speakon NL4MP out Coding: 1 +/- Sub, 2 +/- n.c.
Handles	2 x
Rigging / Fittings	M20 on top
Weight	22,0 kg
Size height x width x depth	44,0 x 40,0 x 44,0 cm
Order No.	00992/dc



Switchable passive crossover.




Two large bar handles for easy handling.



M20 flange on top.

DIMENSIONS

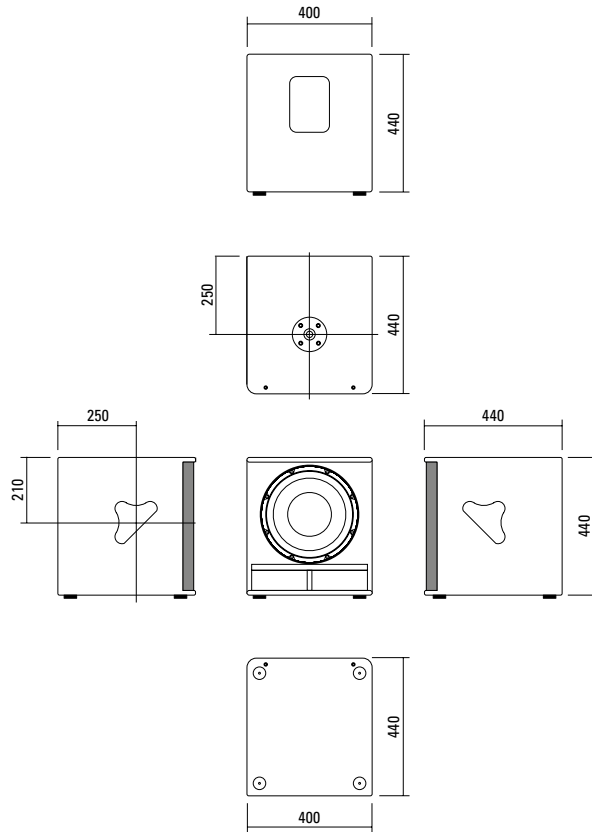

ACCESSORIES TSMini Sub dc

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Cover

for TSMini Sub

Order No. **01250**



Flight Case

for 1 x TSMini Sub, heavy duty, 6,5 mm birch multiplex, PVC coated, ball corners, recessed sprung handles, butterfly catches, rubber bases, interior lined with felt

Order No. **16053**

