



Der G Sub ist ein 18" Hochleistungs-Subwoofer für universelle Anwendungen und erzeugt bereits ab 32 Hz hohe und unverzerrte Tieftonepegel. Das spezielle Gehäusedesign garantiert hohe Reichweite und geringe Powerkompression. Der G Sub überzeugt durch sein ideales Handling und ist horizontal und vertikal einsetzbar. Für den Transport kann auf der Vorderseite ein Rollenwagen montiert werden.

PRODUCT SPECIFICATIONS

Speaker Components	18" Nd
Description	Passive Bass Extension
Power AES / Peak	1800 W / 5400 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1m	103 dB / 138 dB (1,8 kW version)
Usable Range	32 Hz - 120 Hz (-6 dB)
Tuning Frequency excursion minimum	40 Hz
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub
Handles	3 x
Rigging / Fittings	M20 on top and side Wheel board fittings
Weight	43 kg (1,8 kW version) (+ 7 kg wheel board)
Size height x width x depth	69,8 x 51,2 x 68,0 cm
Order No.	00600/1,8 kW



Robustes Wabenlochgitter für starke Beanspruchung.




Zwei große Griffe ermöglichen einfaches Handling.




Praktischer Eckziehgriff.

DIMENSIONS

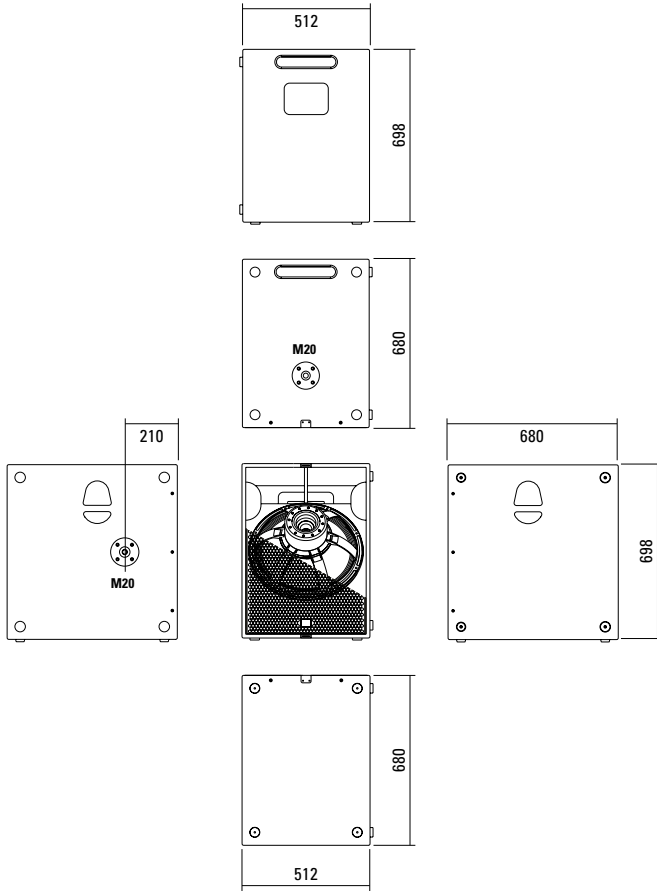


MEASUREMENTS

Frequency Response with Presets

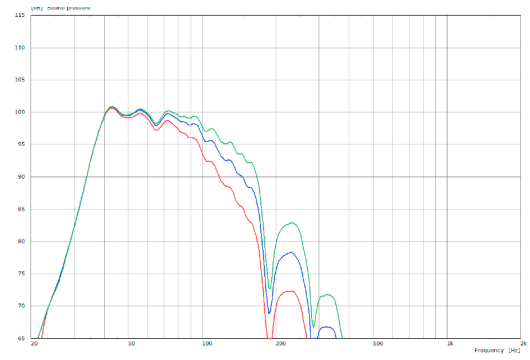

Sensitivity 1 W @ 1 m + Impedance

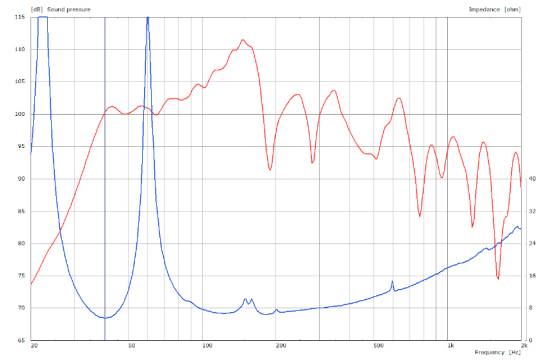

Controller Setups finden Sie unter:

<http://www.seeburg.net/de/downloads>


APPLICATIONS



2 x G Sub dp / K24



G Sub dp / GL 24

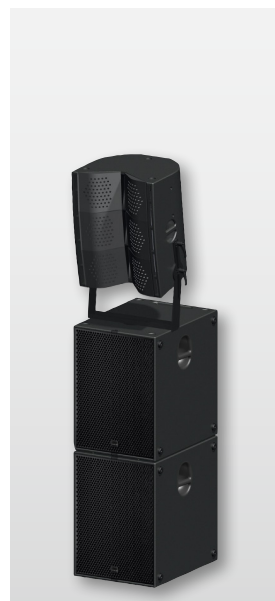

2 x G Sub dp / G3



G Sub / TSM 12

ACCESSORIES G Sub

Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



Ground Stacking Board

for G Sub / K Sub 1801
with extendable legs

Order No. **01394**



Ceiling Mount

for Subwoofer

Order No. **08129**



Cover

for G Sub, padded


Order No. **01232**



Wheel Board

for G Sub / K Sub 1801,
stackable, 7 kg

Order No. **01260**



Ceiling Mount.