





Ultrakompaktes Lautsprechersystem für alle Anwendungen, bei denen eine besonders unauffällige Erscheinung, gute Klangeigenschaften und Leistungsdaten gefordert werden. Der kräftige 5" Neodym Koaxial Lautsprecher strahlt sehr breit und präzise ab und erreicht einen unverzerrten Pegel von über 115 dB. Umfangreiche Fliegepunkte, vielfältige Anschlussmöglichkeiten und der serienmäßige Bügel machen das i5 System zu einem universellen Beschallungswerkzeug für viele Nahfeldanwendungen.

PRODUCT SPECIFICATIONS

Speaker Components	5" Nd (1,5" VC) / 0,75" coaxial
Description	Multi Media Sound System
Power AES / Peak	120 W / 360 W
Impedance nominal	16 Ω
SPL 1 W / Peak @ 1 m	93 dB / 115 dB
Usable Range	110 Hz - 19 kHz (-6 dB)
Tuning Frequency excursion minimum	120 Hz
X - Overpoint acoustical	3,0 kHz
Coverage horizontal / vertical	100° - conical
Connectors	2 x Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru 1 x Phoenix 4-pol
Rigging / Fittings	3 x M10
Weight	2,5 kg
Size height x width x depth	15,0 x 15,0 x 17,6 cm
Order No.	00160/black 00160/white (RAL 9010)

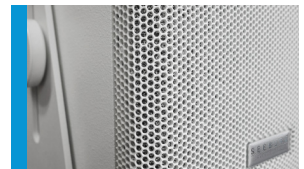


DIMENSIONS

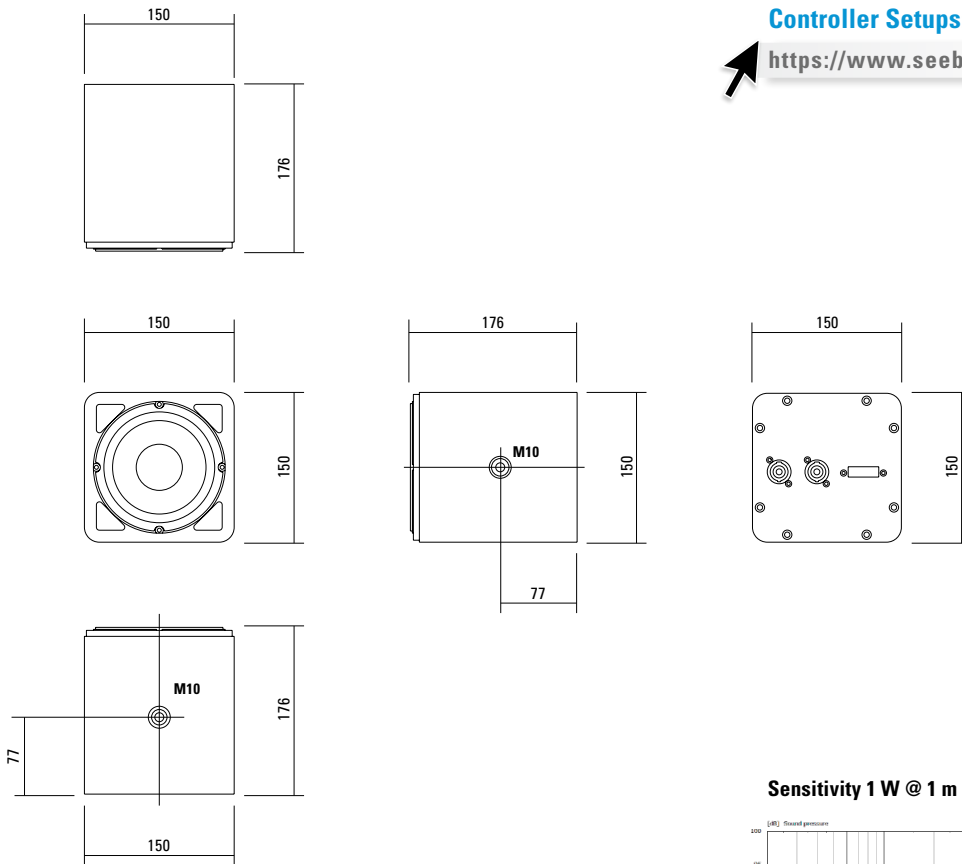

Controller Setups:


<https://www.seeburg.com/de/downloads>

Sensitivity 1 W @ 1 m + Impedance

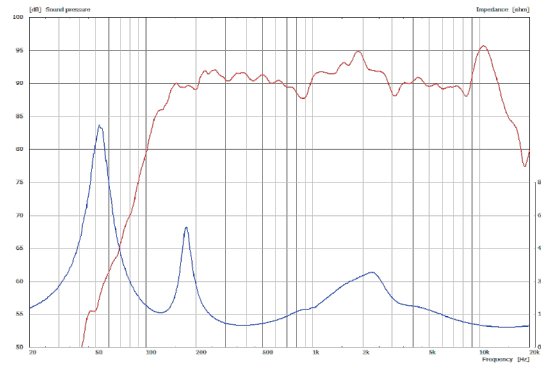


MEASUREMENTS

Frequency Response with Presets

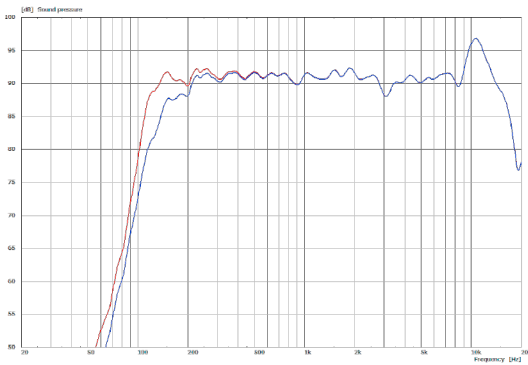

2D Directivity Plot - radial

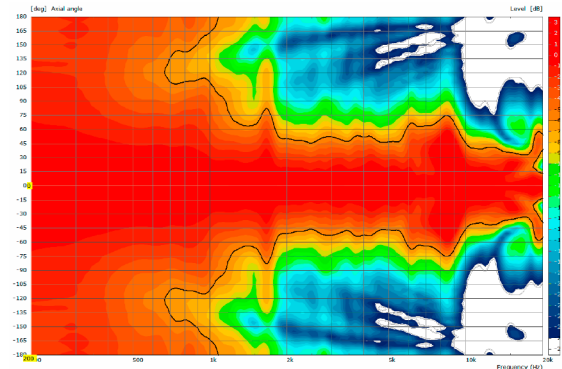

ACCESSORIES i5

Flying Bracket



for i 5,
(incl. 2 x socket screws M10 x 20 mm)

Order No. **01204**
Order No. **01204/w** (RAL 9010)

Knurled Screw



M10 x 20 mm
Order No. **73750**
Order No. **73750/w** (RAL 9010)

Phoenix Connector



2 pol Order No. **08257**
4 pol Order No. **08256**

Doughty Twenty Clamp



M10, max. load 20 kg
Order No. **01223/20 kg**

Truss Clamp



incl. M10 mini TV spigot,
max. load 15 kg
Order No. **01221**

Flange



with ball and socket joint,
with additional locking screw,
M10 x 15 mm, max. load 15 kg
Order No. **08125**

Steel Safety



4 mm x 600 mm, black,
quick connector undetachably,
max. load 10 kg (BGI 810-3)

Order No. **01376/4**

Base Plate, Round



M20, ø 450 mm, height: 21 mm
black zinc die-cast, felt strips on
the bottom, weight: 6,7 kg
Order No. **01278/round**

Speaker Pole, Light

adjustable,
incl. M20 Adapter
Order No. **03004/set**



Flight Case



for 4 pcs. i 5, with mounted flying
brackets 01204, standard, 7,0 mm
birch multiplex, PVC coated, partition
walls, hinged lid, 2 x recessed sprung
handles, 1 x butterfly catch, rubber
feet, interior lined with felt.
Size (H x W x D): 24,0 x 42,0 x 36,0 cm
Order No. **16454**

Flight Case



for 2 pcs. i 5, with mounted flying
brackets 01204, standard, 7,0 mm
birch multiplex, PVC coated, partition
walls, hinged lid, 1 x recessed sprung
handle, 1 x butterfly catch, rubber feet,
interior lined with felt.
Size (H x W x D): 24,0 x 42,0 x 19,0 cm
Order No. **16453**

