

Compact Sound System for Multiple Use **TSM 8**




Multifunctional and compact speaker system for high quality speech and music transmission over short to medium distances. State of the art high performance components combined with the practical enclosure design and the extensive range of accessories make the TSM 8 suitable for a wide variety of demanding applications.

PRODUCT SPECIFICATIONS

Speaker Components	8" Nd / 1"
Description	Multipurpose Sound System
Power AES / Peak	300 W / 900 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	96 dB / 125 dB
Usable Range	70 Hz - 19 kHz (- 6 dB)
Tuning Frequency excursion minimum	73 Hz
X - Overpoint acoustical	1,4 kHz
Coverage horizontal / vertical	90° x 60° - rotatable
Max. Splay Angle	- - -
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
Handles	1 x
Rigging / Fittings	5 x M10 35 mm pole mount
Weight	9 kg
Size height x width x depth	43,0 x 25,0 x 25,0 cm
Order No.	00968




Easy handling regarding the connection- especially for operation as stage monitor.



Practical 35 mm Pole Mount.




DIMENSIONS

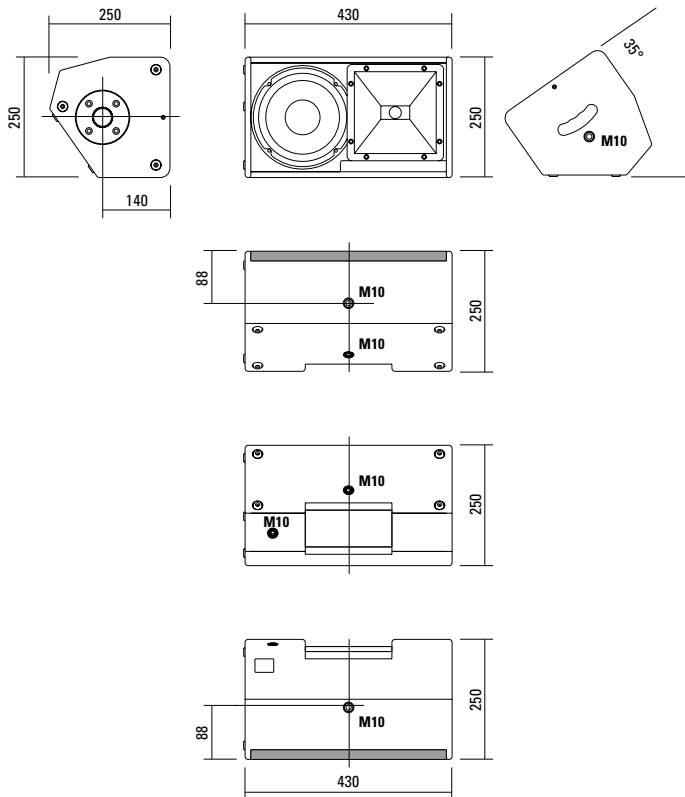

Controller Setups:


<https://www.seeburg.net/en/downloads>

Sensitivity 1 W @ 1 m + Impedance

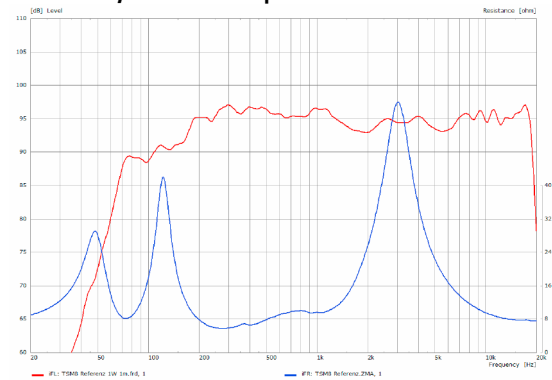


COVERAGE PATTERNS

2D Directivity Plot - horizontal

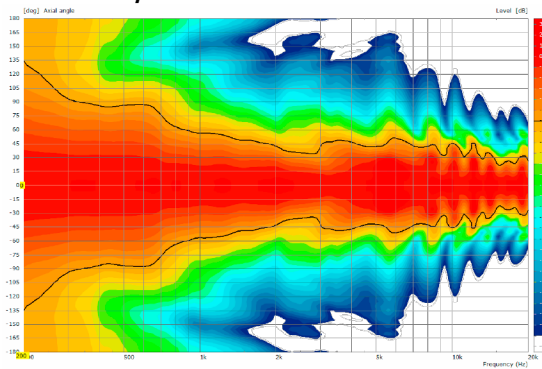

2D Directivity Plot - vertical

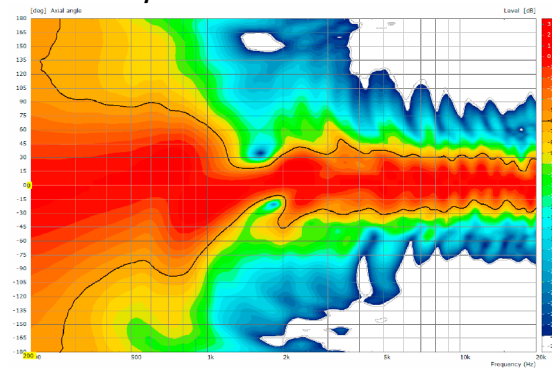

Flying Bracket



for TSM 8 / TS Mini
incl. screws
(per unit: 2 pcs. M10 x 20 ergostyle
lobe knob and rubber washers)
Order No. **01213/set**

Flying Bracket



for TSM 8
horizontal alignment, incl. screws
(per unit: 2 pcs. M10 x 20 socket head
screws, spring- and rubber washers)
Order No. **01213/H/set**

Ergostyle Lobe Knob



for flying brackets,
M10 x 20, with grip, adjustable
Order No. **08171**

Rubber Washer



for flying brackets,
40 mm
Order No. **01205**

Flange



35 mm Ø → M10,
Order No. **08126**

Flange



with ball and socket joint,
with additional locking screw,
M10 x 15, max. load 15 kg
Order No. **08125**

Truss Clamp



incl. M10 Adapter,
max. load 15 kg
Order No. **01221**

Doughty Quick Trigger Clamp



max. load 250 kg
Order No. **01223/250 kg**

Ring Screw



M10– DIN 580
Order No. **73700**

TV Spigot



10 mm internal thread,
28 mm Ø
Order No. **08128**

Steel Safety



4 mm x 600 mm, black,
max. load 10 kg (BGI 810-3),
quick connector undetachably
Order No. **01376/4**

Chain Fastener



VBS 7 mm
Order No. **01378**



ACCESSORIES TSM 8

Wall Mount



for U-brackets, max. load 40 kg,
incl. screws
(M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)
for 8"-12" speakers
Order No. **08130/F269**

Wall Mount



with tilt unit, 40 kg max.
Order No. **08130**

Wall Mount



M10, max. load 15 kg, with stargrip
Order No. **08131**
Order No. **08131/w** (white)

for permanent installation,
incl. tilt angle stop
Order No. **08131/F**
Order No. **08131/F/w** (white)

Speaker Stand



K&M, incl. wind up,
height 138,5 to 218 cm,
max. load 50 kg
Order No. **03011**

K&M, height 137,5 to 218,5 cm,
max. load 50 kg
Order No. **03010**

Hexagon Grille



for TSM 8 front grille version,
for replacement, foam behind
Order No. **97072/hex/compl.**

Bag




for 2 x TSM 8, padded
with pocket for accessories
Order No. **01245**

Rain Cover



for TSM 8 / TSM 8 dp
Order No. **01245/outdoor**

Flight Case Trunk



for 2 pcs. TSM 8,
standard, 7 mm birch multiplex,
PVC coated, hinged lid, 2 x recessed
sprung handles, 2 x butterfly catches,
4 x 100 mm blue wheels, 2 pcs. with
brake, interior lined with felt.
Order No. **16058**

