



The TSM 10 is a multifunctional top class system in compact format. Fitted with a rotatable horn and lightweight, high efficiency Neodym drivers, the the TSM 10 is as equally well suited to use as a full range / high mid PA loudspeaker as it is to monitor applications. This system provides good sound and power handling characteristics in an easy to handle package.

PRODUCT SPECIFICATIONS

Speaker Components	10" Nd / 1"
Description	Multi Purpose Sound System
Power AES / Peak	400 W / 1200 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	96 dB / 126 dB
Usable Range	60 Hz - 19 kHz (-6 dB)
Tuning Frequency excursion minimum	68 Hz
X - Overpoint acoustical	1,5 kHz
Coverage horizontal / vertical	90° x 60° - rotatable
Max. Splay Angle	
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
Handles	1 x
Rigging / Fittings	3 x M10 / 6 x M8 35 mm pole mount
Weight	14,5 kg
Size height x width x depth	51,5 x 32,4 x 29,5 cm
Order No.	00960/11




Ergonomically formed handle on the top surface.



Connection panel.






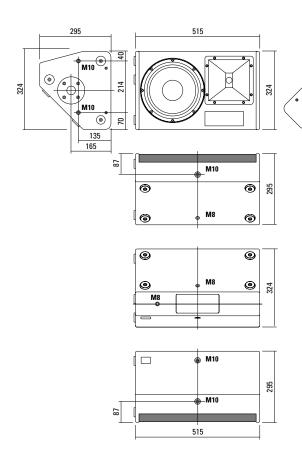


Controller Setups:

https://www.seeburg.net/en/downloads

COVERAGE PATTERNS



2D Directivity Plot - vertical





Flying Bracket

for TSM 10/ A 4 horizontal alignment, incl. screws (per unit: 2 pcs. adapters, M10 hex lock nuts, flat- and rubber washers)

Order No. 01220/H/set



Flying Bracket

for TSM 10 / A 4 incl. screws (per unit: 2 pcs. M10 x 20 ergostyle lobe knob and rubber washers) Order No. 01220/set



Ergostyle Lobe Knob

for flying brackets, M10 x 20, with grip, adjustable Order No. 08171



Rubber Washer

for flying brackets, 40 mm

Order No. 01205



Flange

35 mm Ø -> M10,

Order No. 08126



Flange

with ball and socket joint, with additional locking screw, M10 x 15, max. load 15 kg

Order No. 08125



Truss Clamp

incl. M10 Adapter, max. load 15 kg Order No. 01221

Doughty Quick Trigger Clamp

max. load 250 kg

Order No. 01223/250 kg



Ring Screw

M10-DIN 580

Order No. **73700**



TV Spigot

10 mm internal thread, 28 mm Ø

Order No. 08128



Steel Safety

4 mm x 600 mm, black, max. load 10 kg (BGI 810-3), quick connector undetachably

Order No. 01376/4



Chain Fastener

VBS 7 mm

Order No. 01378



ACCESSORIES TSM 10



Wall Mount

for U-brackets, max. load 40 kg, incl. screws (M10 x 70 mm socket head screw, M10 hex lock nut and flat washer)

for 8"-12" speakers Order No. 08130/F/269



with tilt unit, max. load 40 kg

Order No. 08130



Speaker Stand

K&M, incl. wind up, height 138,5 to 218 cm, max. load 50 kg,

Order No. 03011

K&M, height 137,5 to 218,5 cm, max. load 50 kg,

Order No. 03010





for TSM 10 / A 4, padded

Order No. 01242



Rain Cover

for TSM 10 / A 4


Order No. 01242/outdoor



Honeycomb Grille

for TSM 10 front grille version, for replacement, foam behind

Order No. 97079/hex/compl.



Flight Case

for 2 pcs. TSM 10 / A 4, heavy duty, 9 mm birch multiplex, PVC coated, 2 x recessed sprung handles, 4 x butterfly catches, 4 x 100 mm blue wheels, 2 pcs. with brake, interior lined with felt.


Order No. 16049



Flight Case Trunk

for 2 pcs. TSM 10 / A 4 and accessories, heavy duty, 9 mm birch multiplex, PVC coated, hinged lid, 6 x recessed sprung handles, 2 x butterfly catches, 4 x 100 mm blue wheels, 2 pcs. with brake, interior lined with felt.

Order No. 16060



Flight Case Trunk

for 4 pcs. TSM 10 / A 4 with flying brackets 01220, heavy duty, 9 mm birch multiplex, PVC coated, 6 x recessed sprung handles, 2 x butterfly catches, 4 x 100 mm blue wheels, 2 pcs, with brake, interior lined with felt.

Order No. 16063



